





Chevrolet Tahoe SSV/PPV 2021+

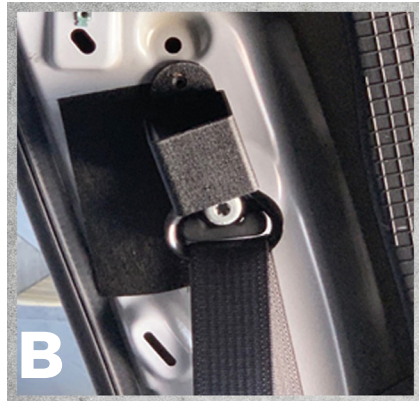

CUSTOM CAGE

Chevrolet Tahoe SSV/PPV 2021+



INSTALLATION GUIDE

Chevrolet Tahoe SSV/PPV 2021+


YOU WILL NEED:

A partner to assist
Installation guide
Socket Wrench Set
T* Socket
Drill with 5/32 drill bit
Impact
Utility Knife
Ratchet

Center punch
Masking tape
Panel tools
Cutters

PARTS LIST

A. Driver Side Block (1 3/4")
B. Passenger Side Block (2")
C. Drivers Side Cargo Bracket
D. Passenger Side Cargo Bracket
E. Upper Cargo Barrier
F. Lower Cargo Barrier
G. Pre-Slit Foam
H. Side Screen
I. Side Screen Lower Bracket
J. Front Screen
K. Front Screen Upper Bracket
L. Front Screen Lower Bracket
M. Hardware and Installation Guide

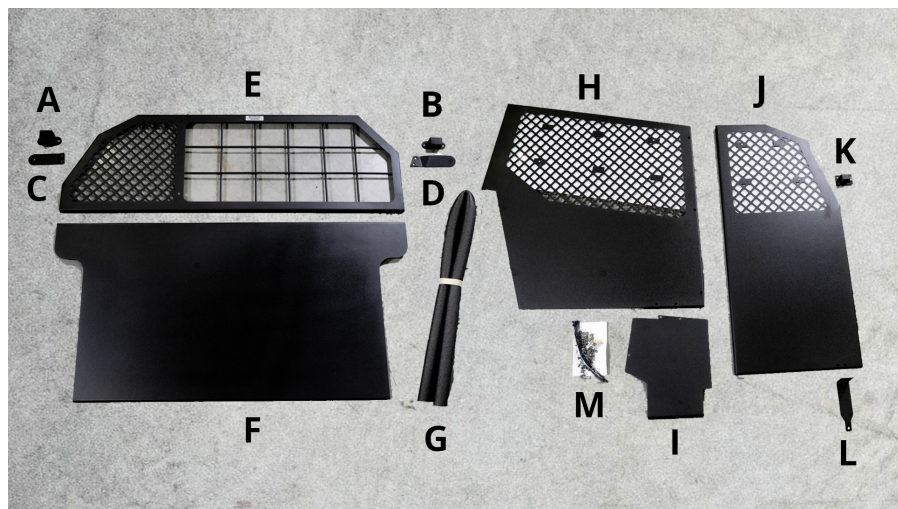

Chevrolet Tahoe SSV/PPV 2021+

INSTALLATION INSTRUCTIONS

DO NOT TIGHTEN BOLTS UNTIL ASSEMBLY IS COMPLETE!

1. Move both front seats fully forward and lower second-row seat backs.
2. Remove upper plastic trim on both C-Pillars.
3. Remove the seat belt bolt using a T* socket (Photo A).
4. Place the 2" block on the passenger's side and the 1 3/4" block on driver side. The seatbelt bolt will go through the larger hole with the smaller hole going up parallel to the door frame.
5. Drill a 9/64" pilot hole in middle of smaller hole. Install a 1" self-tapping screw in pilot hole. Repeat on opposite side.
6. Re-Install plastic trim on both C-Pillars.
7. Drill a 9/64" pilot hole 5 3/8" from the top of the plastic molding. This should go through the plastic molding and into the metal spacer blocks installed in Step 5.
8. Raise second-row seat backs back up and move seat to furthest rear position.
9. Place driver side and passenger side cargo brackets **loosely** on the upper cargo barrier. Brackets will face front of vehicle. The upper cargo barrier lip will face rear of vehicle.
10. With a partner, place back screen in vehicle. It will not touch headliner and should fit flush to the back of second-row seat back.
11. Install rear lower cargo barrier **loosely** to upper cargo barrier.
12. Install side screen between lower second row seat and connect to upper cargo barrier.
13. Install foam tube with zip ties to side screen.
14. Install side screen lower bracket.
15. Remove the rear outer seat bolt from passenger front seat.
16. Install front screen lower bracket under seat rail and re-install bolt.
17. With a partner, move front screen into the vehicle. Place two bolts through outer seat lower bracket and through the **front** screen.
18. Place front screen upper bracket on upper front screen.
19. Install hook around grab handle and to front screen bracket. Hook should face rear of the vehicle. **Optional:** Use small foam tube piece to protect grab handle and create a tighter fit.
20. Install foam tube with zip ties to front screen.
21. Tighten all bolts.