





Dodge Durango SSV 2011+

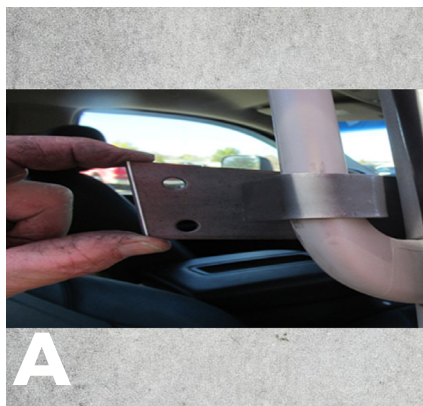

CUSTOM CAGE

Dodge Durango SSV 2011+



INSTALLATION GUIDE



Dodge Durango SSV 2011+


YOU WILL NEED:

A partner to assist
Installation guide
Socket Set
Drill with 5/32 drill bit
Impact
Utility Knife
Ratchet
Center punch

Masking tape
Panel tools/Screwdriver
Cutters

PARTS LIST

A. Passenger Side Block (1.5"x1.5"x2")	H. Front Screen
B. Driver Side Block (1.5"x1.5"x2")	I. U-Clamp/Front Screen Upper Bracket
C. Passenger Side Cargo Barrier Bracket	J. Front Screen Lower Bracket
D. Driver Side Cargo Barrier Bracket	K. Pre-Slit Foam
E. Cargo Barrier	L. Hardware and Installation Guide
F. Side Screen	
G. Floor Bracket (Kick Panel)	

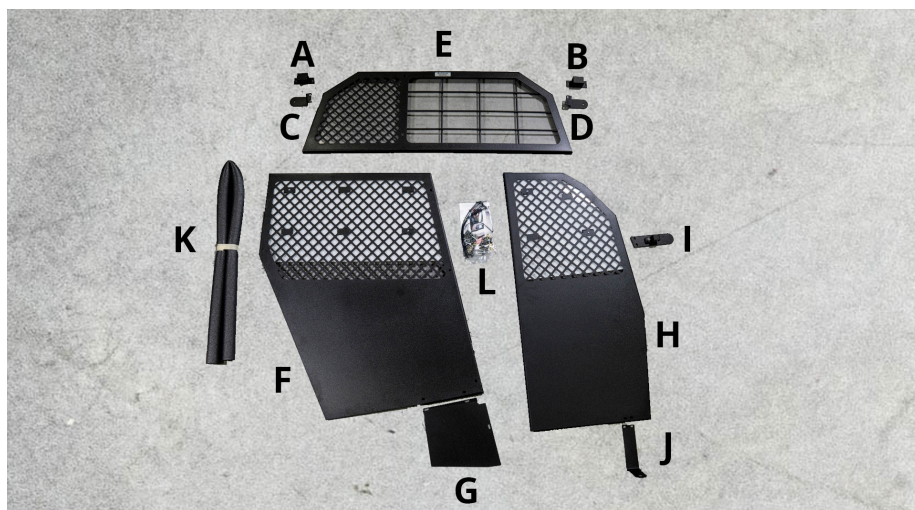

Dodge Durango SSV 2011+

INSTALLATION INSTRUCTIONS

DO NOT TIGHTEN BOLTS UNTIL ASSEMBLY IS COMPLETE!

1. With the Custom Cage logo facing the front of the vehicle, **loosely** install the cargo barrier brackets to rear cargo barrier. Brackets are side specific to conform with plastic.
2. Place cargo barrier in the rear of the vehicle and hold against seats and roof. Mark the plastic pillar post where brackets will mount - roughly 2.5" down from headliner.
3. Remove pillar plastic from both sides and install the 1.5"x1.5"x2" block brackets to the pillar post with two (2) 1" tap screws each. Verify the brackets line up with marks and do not interfere with plastic or fins. Replace plastic on both sides. Drill marked holes and **loosely** install cargo barrier.
4. Slide front passenger seat forward. Remove outside rear seat rail bolt.
5. Place side screen in vehicle and slide between rear passenger and rear driver side seats, tipping up as you slide. Open the area where the seatbelt is located between the seats. This will help get the side screen in place. Align side screen and cargo barrier and **loosely** bolt together. Install floor bracket (kick plate) to lower front of the side screen.
6. Install the "U" clamp around the emergency grab handle and secure. To avoid scratching and to tighten fit, slide foam tube piece between bracket and handle.
7. Install lower front screen bracket under seat rail and **loosely** install seat rail bolt.
8. Install foam tube to upper part of front screen.
9. Place front screen in vehicle and attach to upper seatbelt bracket, side screen, and floor bracket. **Finger tighten only!** Install seat rail bracket to lower front screen.
10. Tighten all bolts and fasteners, replace front pillar post plastic and finish foam tube with zip ties.