

Dodge RAM Crew 2009+



Dodge RAM Crew 2009+



INSTALLATION GUIDE

www.customcageinc.com | 6102 North 23rd Street, Ozark, MO 65721 | 605.642.7609






Dodge RAM Crew 2009+

YOU WILL NEED:

A partner to assist Installation guide Socket Set Impact Ratchet Panel tools Screwdriver Cutters

PARTS LIST

- A. Upper Side Screen
- B. Lower Side Screen
- C. Upper Side Screen Rear Bracket
- D. Headrest Bracket
- E. Floor Bracket (Kick Plate)
- F. Front Screen
- G. Front Screen Upper Bracket
- H. Lower Floor Bracket

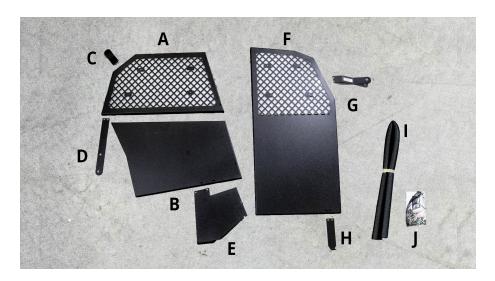

I. Pre-Slit Foam

I. Hardware and Installation Guide

Dodge RAM Crew 2009+

INSTALLATION INSTRUCTIONS DO NOT TIGHTEN BOLTS UNTIL ASSEMBLY IS COMPLETE!

- 1. Remove rear outside seat rail bolt from passenger front seat.
- 2. Remove passenger front seatbelt bolt.
- 3. Remove clothes hook passenger side rear.
- 4. Remove passenger rear headrest.
- 5. Bolt upper side screen to lower side screen.
- 6. Place the side screen in the vehicle and install the headrest bracket to the rear of the side screen and re-install the headrest.
- 7. Install foam tube with zip ties along top edge of cage.
- 8. Install the lower floor bracket to the front screen. Hand tighten only.
- 9. Install the front screen upper bracket and tighten.
- 10. Install the upper rear side screen bracket and align right next to the hole left by the clothes hook fastener.
- 11. Loosely install the floor bracket to the side screen.
- 12. Place the front screen in the vehicle and loosely attach to the side screen.
- 13. Attach front screen upper bracket to the seatbelt then replace seatbelt harness.
- 14. Install the floor bracket to the seat rail.
- 15. After squaring the entire cage to the pillar post and to the rear seat area, attach the upper rear side screen bracket right next to the fastening point of the clothes hook using the provided tap screw.
- 16. Tighten all bolts.
- 17. Use the passenger seat and push back to secure the side screen to the rear seat, fasten the floor bracket to the driveshaft hump.